

DRILLING AND MILLING HEAD, RADIAL 90°, ER32, INTERNAL & EXTERNAL COOLANT SUPPLY

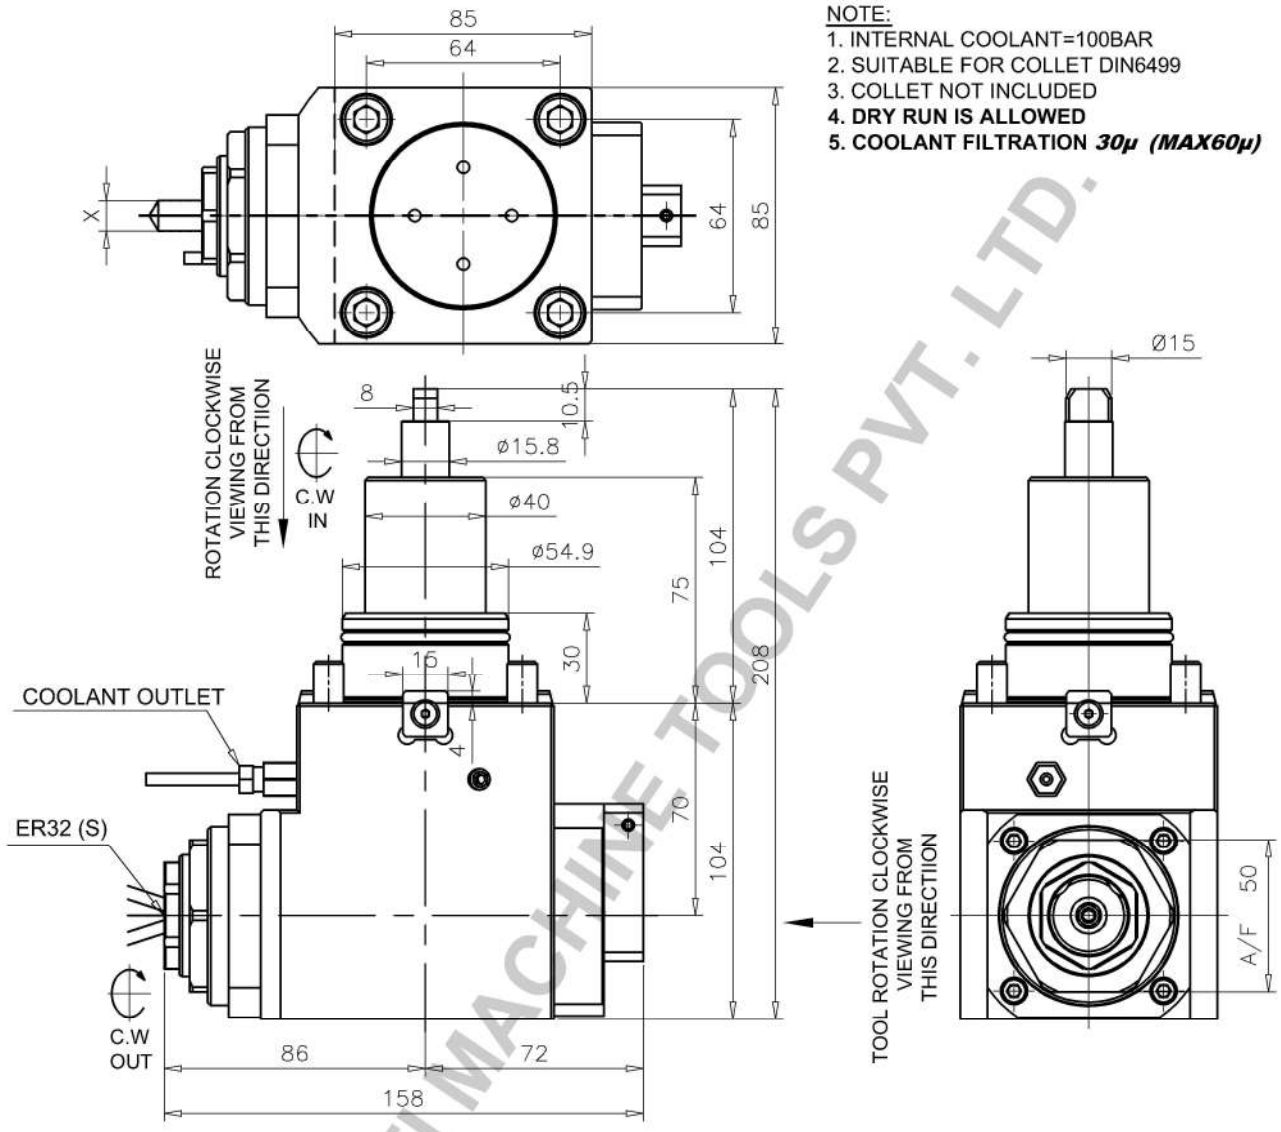

NOTE:
1. INTERNAL COOLANT=100BAR
2. SUITABLE FOR COLLET DIN6499
3. COLLET NOT INCLUDED
4. **DRY RUN IS ALLOWED**
5. **COOLANT FILTRATION *30µ (MAX60µ)***

SPHOORTI MACHINE TOOLS PVT. LTD.

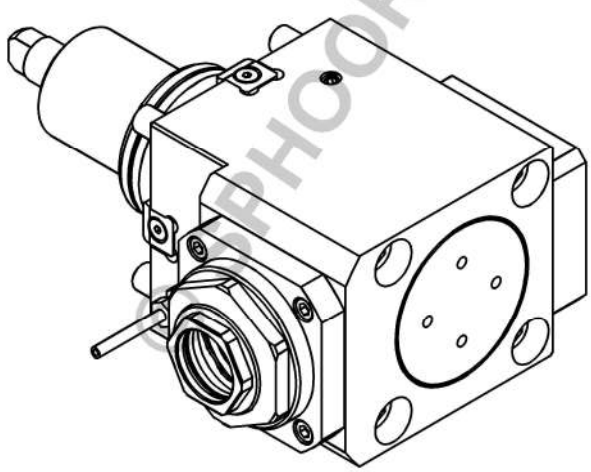

TECHNICAL SPECIFICATIONS

ITEM ID	SD7170
ITEM DESCRIPTION	B55-RTH-ER32-CH-70-DIN1809 INT NUT-TC
COUPLING TYPE (P)	DIN1809-Ø15X8X10.5
RATIO	1:1
INPUT RPM	Max 6000 RPM
OUTPUT RPM	Max 6000 RPM
OUTPUT TORQUE	40 N-m
DIRECTION OF ROTATION	INPUT=OUTPUT
COLLET (S)	ER32 (DIN6499)
COLLET RANGE (X)	ø2-ø20
MASS OF TOOL HOLDER	6.6 Kgs

Scale	Title		Drawn	Approved	Projection
1:2.5	B55-RTH-ER32-CH-70-DIN1809 INT NUT-TC	by	SATHISH	SATHISH	
Size A4		date	20-10-23	20-10-23	

SPHOORTI

SPHOORTI MACHINE TOOLS PVT LTD
BANGALORE-560058

DRAWING NO: SD7170

No.of Sheets 01 | Sheet No. 01